

WOOD WITHOUT
COMPROMISE





ACCOYA® HAS PROPERTIES
THAT MATCH OR EXCEED
THOSE OF THE BEST
TROPICAL HARDWOODS
AND TREATED WOODS

50 Year Warranty

Rot and Insect Barrier

Paint and Stain Lasts 3-5 Times Longer





SIDING AND EXTERIOR TRIM

Accoya® is the ideal choice where aesthetics and less frequent maintenance are important to you

Dimensional stability, durability and natural UV resistance of Accoya wood confirms a decreased overall life cycle cost

WINDOWS AND DOORS

Swing freely because Accoya® swells very little

Paint and stain lasts 3-5 times longer on Accoya® so your windows and doors will look great for many years


Less maintenance required which increases the cost effectiveness of using Accoya

Provide your customers with the transferable 50 year Accoya® warranty




EXCEPTIONAL EXTERIOR PERFORMANCE

5 Year Weathering Test*

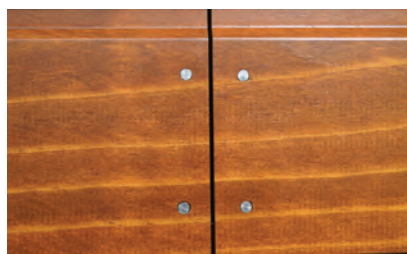

Accoya Modified Wood
Pristine after 5 years exposure.

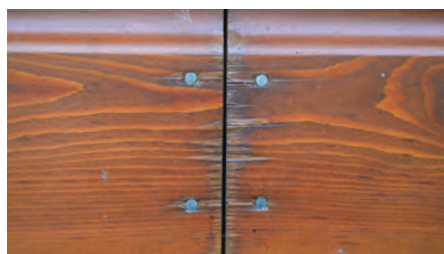

Western Red Cedar
Requires complete refinishing after 5 years.

* Independent 3rd party testing by BM Trada

DECKS AND DOCKS

In specifying decking you want...

Natural beauty, strength and all-weather performance are important

A lasting wood with outstanding performance characteristics and dimensional stability

A wood that is non-toxic and therefore safe for people and pets

Accoya wood meets all these requirements and more.

ACCOYA® WOOD PRODUCT DETAILS

MATERIAL

4 sides clear of knots and defects

DIMENSIONS

Thickness 4/4, 6/4, 8/4, 10/4 and 12/4

4/4 is supplied as S2S 22mm

Lengths 8' to 16'

SHRINK AND SWELL

A fraction of the movement of other woods
Accoya® is 0.7% radial and 1.5% tangential

DURABILITY

Class 1, matching and even exceeding the
performance of nature's most durable woods

FIRE RATING

Class C Accoya® can be after-market treated with
fire retardants to achieve a Class A rating

FSC® CERTIFIED

50 YEAR WARRANTY

This warranty is exclusive to the original owner
of any structure on which the Accoya® wood is
installed and the next owner of that structure.

- **50 years** when the Accoya® wood product
is used above ground
- **25 years** when the Accoya® wood product
is used at or below ground level

Access your copy of the Accoya® wood Warranty
at www.sierrafp.com

GUIDELINES FOR USE

GLUING

Accoya® wood can be glued using many commonly
used wood adhesive systems. Particularly good
results are obtained with polyurethane (PU),
emulsion polymer isocyanate (EPI), epoxy and
phenol resorcinol formaldehyde (PRF) adhesives.

FASTENERS & OTHER HARDWARE

Corrosion-resistant, high quality 304 or 316
stainless steel or naval brass fasteners are
recommended.

COATINGS

Most high quality outdoor approved wood coating
systems last three or more times longer.

MACHINABILITY

Accoya® machines more like a hardwood and
requires no special tools for cross cutting, ripping,
planing, routing or drilling.

DISPOSAL

Dispose like regular wood



Sierra Forest Products
www.sierrafp.com

| | | |
|----------------|----------------|--|
| Chicago | 1 800 646 7564 | sales_chicago@sierrafp.com |
| Denver | 1 877 972 9112 | sales_denver@sierrafp.com |
| Salt Lake City | 1 800 678 2801 | sales_saltlakecity@sierrafp.com |
| St. George | 1 800 678 2801 | sales_stgeorge@sierrafp.com |
| Seattle | 1 877 722 0070 | sales_seattle@sierrafp.com |
| Portland | 1 877 722 0070 | sales_portland@sierrafp.com |
| Los Angeles | 1 800 548 3975 | sales_losangeles@sierrafp.com |

